



LANCASTER


DIN 7976

# Self-Tapping Screws

Hexagon

Steel / Zinc Plated (CR3)  
Steel / Black (CR3)

RoHS 2 Compliant

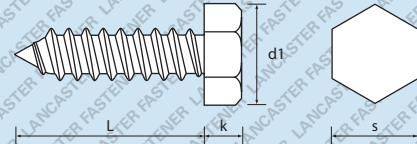

All images are copyright protected

Further technical data is available on pages 186 -188

## TYPE C pointed

| Dia. mm      | 2.2                                                               | 2.9  | 3.5                   | 3.9  | 4.2                   | 4.8                   | 5.5                  | 6.3                 | Dia. mm     |
|--------------|-------------------------------------------------------------------|------|-----------------------|------|-----------------------|-----------------------|----------------------|---------------------|-------------|
| Dia. Gauge   | 2                                                                 | 4    | 6                     | 7    | 8                     | 10                    | 12                   | 14                  | Dia. Gauge  |
| d1 - max     | -                                                                 | -    | -                     | -    | -                     | -                     | -                    | -                   | d1 - max    |
| k - nom      | 1.30                                                              | 1.50 | 2.30                  | 2.30 | 2.80                  | 3.00                  | 4.00                 | 4.80                | k - nom     |
| s - A/F max  | 3.20                                                              | 5.00 | 5.50                  | 7.00 | 7.00                  | 8.00                  | 8.00                 | 10.00               | s - A/F max |
| Recess       | -                                                                 | -    | -                     | -    | -                     | -                     | -                    | -                   | Recess      |
| L- Length mm | Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000 |      |                       |      |                       |                       |                      | L- Length ins       |             |
| 4.5          |                                                                   |      |                       |      |                       |                       |                      |                     | 3/16        |
| 6.5          |                                                                   |      |                       |      |                       |                       |                      |                     | 1/4         |
| 8            |                                                                   |      |                       |      |                       |                       |                      |                     | 5/16        |
| 9.5          |                                                                   |      | 16,000   1,000   0.76 |      | 13,000   1,000   1.29 | 12,500   1,000   1.70 |                      |                     | 3/8         |
| 13           |                                                                   |      | 16,000   1,000   0.92 |      | 12,000   1,000   1.54 | 9,000   1,000   2.02  | 6,000   1,000   2.72 | 4,500   500   4.25  | 1/2         |
| 16           |                                                                   |      |                       |      | 10,000   1,000   1.76 | 8,000   1,000   2.32  | 5,000   1,000   3.09 | 4,000   500   4.77  | 5/8         |
| 19           |                                                                   |      | 13,000   1,000   1.23 |      | 8,000   1,000   1.97  | 7,000   1,000   2.61  | 5,000   1,000   3.48 | 3,700   500   5.30  | 3/4         |
| 22           |                                                                   |      |                       |      |                       |                       |                      |                     | 7/8         |
| 25           |                                                                   |      |                       |      | 7,000   1,000   2.45  | 6,000   1,000   3.19  | 4,800   500   4.25   | 3,000   500   6.35  | 1           |
| 32           |                                                                   |      |                       |      |                       | 5,000   500   3.88    | 3,500   500   5.14   | 2,300   250   7.57  | 1 1/4       |
| 38           |                                                                   |      |                       |      |                       | 4,000   500   4.46    | 2,500   500   5.90   | 2,300   250   8.63  | 1 1/2       |
| 45           |                                                                   |      |                       |      |                       |                       |                      | 2,000   250   9.89  | 1 3/4       |
| 50           |                                                                   |      |                       |      |                       |                       | 2,000   250   6.96   | 1,700   250   10.36 | 2           |
| 57           |                                                                   |      |                       |      |                       |                       |                      |                     | 2 1/4       |
| 63           |                                                                   |      |                       |      |                       |                       |                      |                     | 2 1/2       |
| 70           |                                                                   |      |                       |      |                       |                       |                      |                     | 2 3/4       |
| 75           |                                                                   |      |                       |      |                       |                       |                      |                     | 3           |

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219 for further detail.

### PRODUCT CODE EXAMPLE

LTABHEX63190ZC  
LTABHEX35130ZN

### PRODUCT DESCRIPTION EXAMPLE

6.3 x 19.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)  
3.5 x 13.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.  
© 2018, Lancaster Fastener Co Ltd

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com 17

SELF-TAPPING  
SCREWS

SELF-DRILLING  
SCREWS

TAP-FIX® THREAD  
ROLLING SCREWS

ROLLED THREAD  
MACHINE SCREWS

TAMPER PROOF  
SECURITY SCREWS

HAMMER DRIVE  
SCREWS

SCREWS FOR  
PLASTICS

MICRO DIAMETER  
SCREWS

K-SERIES®  
SETZMUTTERN

RIVET BUSHES &  
SELF-CLINCHING  
FASTENERS

CD WELD STUDS

BRASS INSERTS  
FOR PLASTICS

TECHNICAL DATA