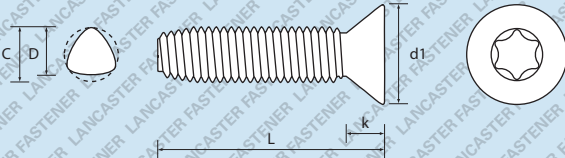


SELF-TAPPING SCREWS	 LANCASTER		DIN 7500								
SELF-DRILLING SCREWS	TAP-FIX® Thread Rolling Screws FOR METAL		T-Drive® (6-Lobe) Countersunk Steel / Zinc Plated (CR3) & Lubricated Steel / Black (CR3) RoHS 2 Compliant								
TAP-FIX® THREAD ROLLING SCREWS											
ROLLED THREAD MACHINE SCREWS	All images are copyright protected		Further technical data is available on page 190								
TAMPER PROOF SECURITY SCREWS	FORM M DIN965										
	Dia. D max	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D max	
	Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max	
	d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max	
	k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref	
HAMMER DRIVE SCREWS	s - A/F	-	-	-	-	-	-	-	-	s - A/F	
	Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess	
SCREWS FOR PLASTICS	L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length mm	
	4	85,000 1,000 0.22								4	
MICRO DIAMETER SCREWS	5	70,000 1,000 0.26								5	
	6	150,000 1,000 0.13	90,000 1,000 0.22	65,000 1,000 0.32	30,000 1,000 0.60					6	
K-SERIES® SETZMUTTERN	7									7	
	8	75,000 1,000 0.28	44,000 1,000 0.45	35,000 1,000 0.58	26,000 1,000 0.76	15,000 1,000 1.19				8	
RIVET BUSHES & SELF-CLINCHING FASTENERS	10	50,000 1,000 0.32	38,000 1,000 0.55			20,000 1,000 0.92	12,000 1,000 1.48	9,000 1,000 2.08	10		
	12			33,000 1,000 0.64			20,000 1,000 1.03	10,500 1,000 1.75	8,000 1,000 2.62	12	
CD WELD STUDS	14									14	
	16					15,000 1,000 1.38	9,000 1,000 2.23	6,000 1,000 3.30	3,000 250 5.95	16	
BRASS INSERTS FOR PLASTICS	18									18	
	20					12,000 1,000 1.65	7,500 1,000 2.70	5,000 500 3.94	2,000 125 7.19	20	
TECHNICAL DATA	25			16,000 1,000 1.12			9,000 1,000 1.95	6,000 1,000 3.36	4,000 500 4.86	2,000 125 8.68	25
	30			13,000 1,000 1.32			9,000 500 2.33	4,000 500 3.85	3,000 250 5.61	1,500 125 10.14	30
	35					6,500 500 2.68					35
	40							2,400 250 6.53	1,000 125 13.16	40	
	45									45	
	50							1,500 250 8.87	1,000 125 16.32	50	
Zinc Plated (CR3) - preferred and available from stock. Black (CR3) - non preferred and may be subject to a lead time and MOQ. Zinc Plated (CR3) & Black (CR3) - preferred and available from stock. See Page 219 for further detail.											
PRODUCT CODE EXAMPLE		PRODUCT DESCRIPTION EXAMPLE									
TTMWTXCSK60012ZC		M6 x 12 T-Drive® Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Zinc Plated (CR3)									
TTMWTXCSK40012ZN		M4 x 12 T-Drive® Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Black (CR3)									
Tap-Fix® and T-Drive® are registered trade marks of Lancaster Fastener Co Ltd E. & O. E. © 2018, Lancaster Fastener Co Ltd											
46		t: +44 (0) 1524 389 232		f: +44 (0) 1524 66367		enquiries@lancasterfastener.co.uk		www.lancasterfastener.com			