

SELF-TAPPING
SCREWSSELF-DRILLING
SCREWSTAP-FIX® THREAD
ROLLING SCREWSROLLED THREAD
MACHINE SCREWSTAMPER PROOF
SECURITY SCREWSHAMMER DRIVE
SCREWSSCREWS FOR
PLASTICSMICRO DIAMETER
SCREWSK-SERIES®
SETZMUTTERNRIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA




LANCASTER

INCH

Thread Rolling Screws

FOR PLASTICS

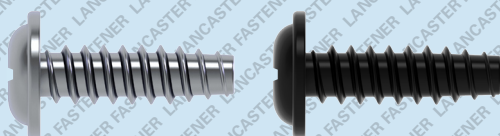

All images are copyright protected


PLAS-FIX® 60°

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant

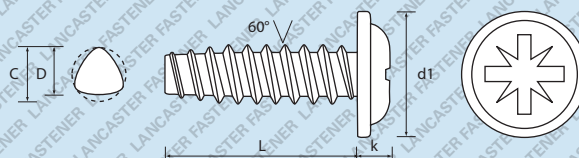

Further technical data is available on page 199

Dia. Gauge	2.28	4.20	6.19	8.16	10.14	-	-	-	Dia. Gauge
Dia. D max	0.089	0.123	0.143	0.179	0.208	-	-	-	Dia. D max
Dia. C max	0.092	0.127	0.147	0.185	0.212	-	-	-	Dia. C max
d1 - max ins	0.194	0.257	0.321	0.384	0.448	-	-	-	d1 - max ins
k - max ins	0.059	0.063	0.074	0.093	0.114	-	-	-	k - max ins
Recess	1	1	2	2	2	-	-	-	Recess
L- Length ins	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
3/16									3/16
1/4	45,000 1,000 0.39	30,000 1,000 0.69							1/4
5/16		25,000 1,000 0.72							5/16
3/8	35,000 1,000 0.51	25,000 1,000 0.78	15,000 1,000 1.29						3/8
7/16									7/16
1/2		25,000 1,000 0.78							1/2
9/16									9/16
5/8	25,000 1,000 0.75								5/8
3/4									3/4
1									1
1 1/4									1 1/4
1 3/8									1 3/8
-									-
-									-
-									-
-									-

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219
for further detail.

PRODUCT CODE EXAMPLE

PTWZFLN35095ZC
PTWZFLN42095ZN

PRODUCT DESCRIPTION EXAMPLE

6.19 x 3/8 Cross Recess (Z) Flange Plas-Fix® 60° Screw Steel / Zinc Plated (CR3)
8.16 x 3/8 Cross Recess (Z) Flange Plas-Fix® 60° Screw Steel / Black (CR3)

Plas-Fix® is a registered trade mark of Lancaster Fastener Co Ltd
E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

122

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com