



LANCASTER

DIN965

Micro Diameter

MACHINE SCREWS


Cross Recess (Z) Countersunk

A2 - Stainless Steel

RoHS 2 Compliant



All images are copyright protected

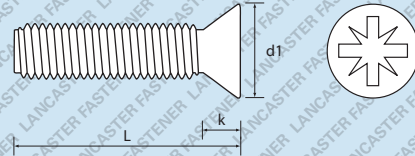

Further technical data is available on page 204

Thread	M1.6	M2	M2.5	-	-	-	-	-	-	Thread
Dia. Gauge	-	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.00	3.80	4.70	-	-	-	-	-	-	d1 - max
k - ref	0.96	1.20	1.50	-	-	-	-	-	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000									L- Length mm
3	400,000 1,000 0.06									3
4		200,000 1,000 0.12	100,000 1,000 0.21							4
5		160,000 1,000 0.14	100,000 1,000 0.24							5
6		133,000 1,000 0.15	90,000 1,000 0.27							6
8		83,000 1,000 0.19	67,000 1,000 0.33							8
10		67,000 1,000 0.23	56,000 1,000 0.39							10
12		50,000 1,000 0.27	48,000 1,000 0.45							12
16		50,000 1,000 0.34	35,000 1,000 0.57							16
20			25,000 1,000 0.69							20
25			22,000 1,000 0.84							25
30										30
35										35
40										40
45										45
50										50
55										55
60										60
70										70
80										80
90										90
100										100

A2 - Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSMSMZCSK16006A2

PRODUCT DESCRIPTION EXAMPLE

M1.6 x 6 Cross Recess (Z) Countersunk DIN 965 Micro Screw A2 - Stainless Steel

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

180° & 360° NYLOK® Blue Patching service available on M2 dia. and above.

See page 219 for further detail.

NYLOK® is a registered trade mark of NYLOK®.

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com

137

TECHNICAL DATA

BRASS INSERTS
FOR PLASTICS

CD WELD STUDS

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

K-SERIES®
SETZMUTTERN

MICRO DIAMETER
SCREWS

SCREWS FOR
PLASTICS

HAMMER DRIVE
SCREWS

TAMPER PROOF
SECURITY SCREWS

ROLLED THREAD
MACHINE SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

SELF-DRILLING
SCREWS

SELF-TAPPING
SCREWS